


■ Features

- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications.

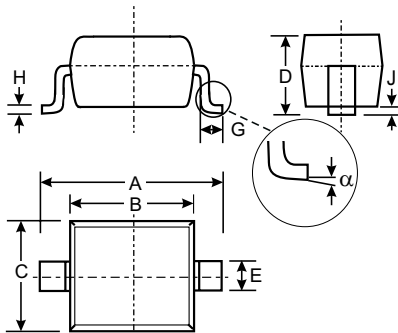

SOD-323		
Dim	Min	Max
A	2.30	2.70
B	1.60	1.80
C	1.20	1.40
D	1.05 Typical	
E	0.25	0.35
G	0.20	0.40
H	0.10	0.15
J	0.05 Typical	
α	0°	8°
All Dimensions in mm		

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	B5817WS	B5818WS	B5819WS	Unit
Non-Repetitive Peak reverse voltage	V_{RM}	20	30	40	V
Peak repetitive Peak reverse voltage	V_{RRM}	20	30	40	V
Working Peak Reverse Voltage	V_{RWM}				
DC Blocking Voltage	V_R				
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Output Current	I_O	1			A
Peak forward surge current @=8.3ms	I_{FSM}	25			A
Repetitive Peak Forward Current	I_{FRM}	625			mA
Power Dissipation	P_d	250			mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500			K/W
Storage temperature	T_{STG}	-55 to 150			°C

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Reverse breakdown voltage	$V_{(BR)}$	$I_R = 1\text{mA}$	20 30 40			V
Reverse voltage leakage current	I_R	$V_R = 20\text{V}$ $V_R = 30\text{V}$ $V_R = 40\text{V}$			1	mA
Forward voltage	V_F	$I_F = 1\text{A}$			0.45	V
		$I_F = 3\text{A}$			0.75	V
		$I_F = 1\text{A}$			0.55	V
		$I_F = 3\text{A}$			0.875	V
Forward voltage	V_F	$I_F = 1\text{A}$			0.6	V
		$I_F = 3\text{A}$			0.9	V
Diode capacitance	C_D	$V_R = 4\text{V}, f = 1\text{MHz}$			120	pF

■ Marking

NO.	B5817WS	B5818WS	B5819WS
Marking	SJ	SK	SL

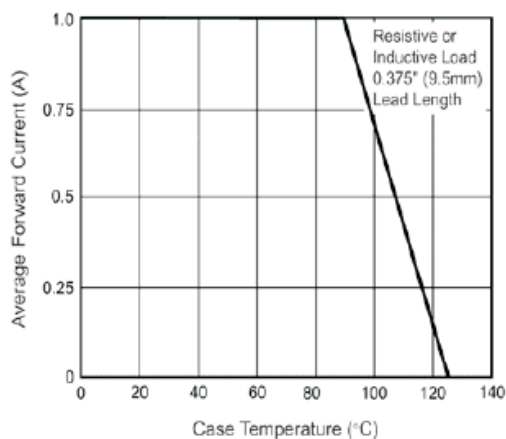
Typical Characteristics
1.0A Schottky Barrier Diode
■ Typical Characteristics


Fig.1 Forward Current Derating Curve

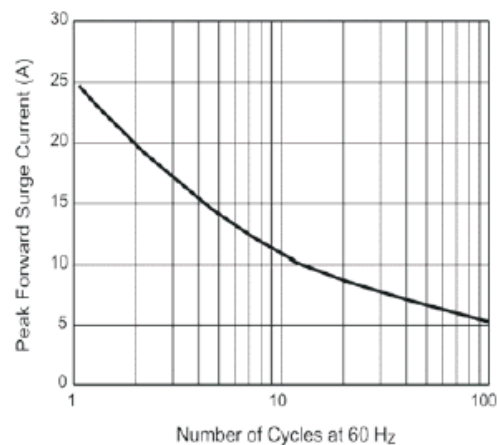


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

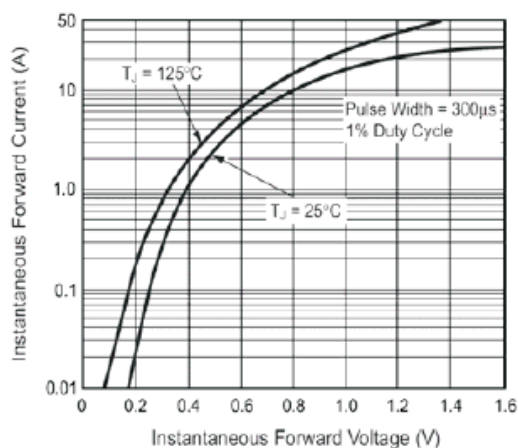


Fig.3 Typical Instantaneous Forward Characteristics

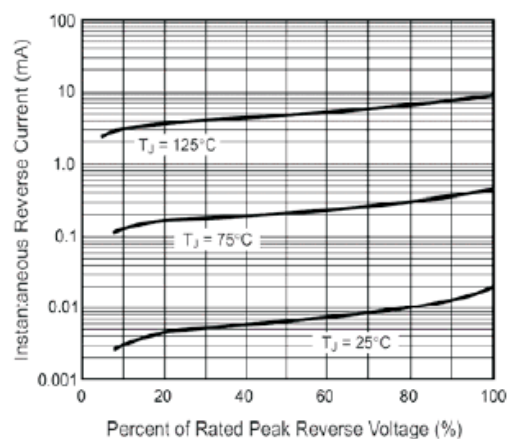


Fig.4 Typical Reverse Characteristics

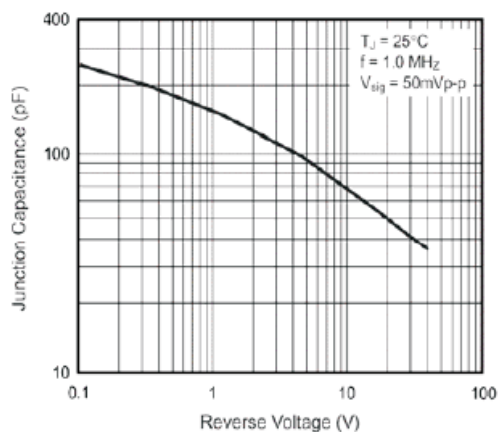


Fig.5 Typical Junction Capacitance

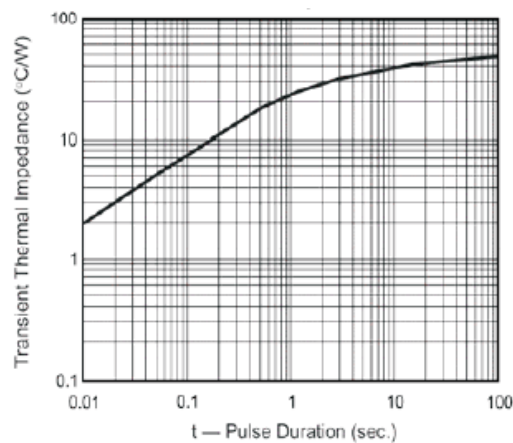


Fig.6 Typical Transient Thermal Impedance